
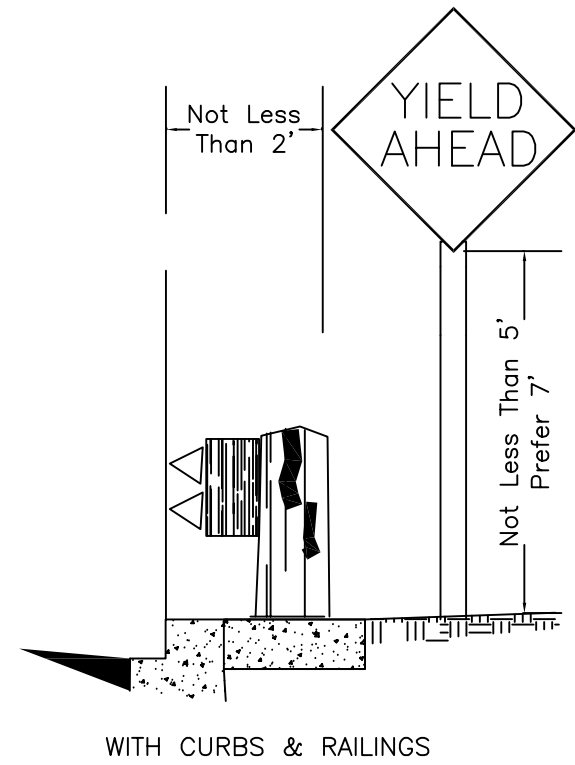



STANDARD CLEARANCES REQUIRED FOR
REGULATORY AND WARNING SIGNS

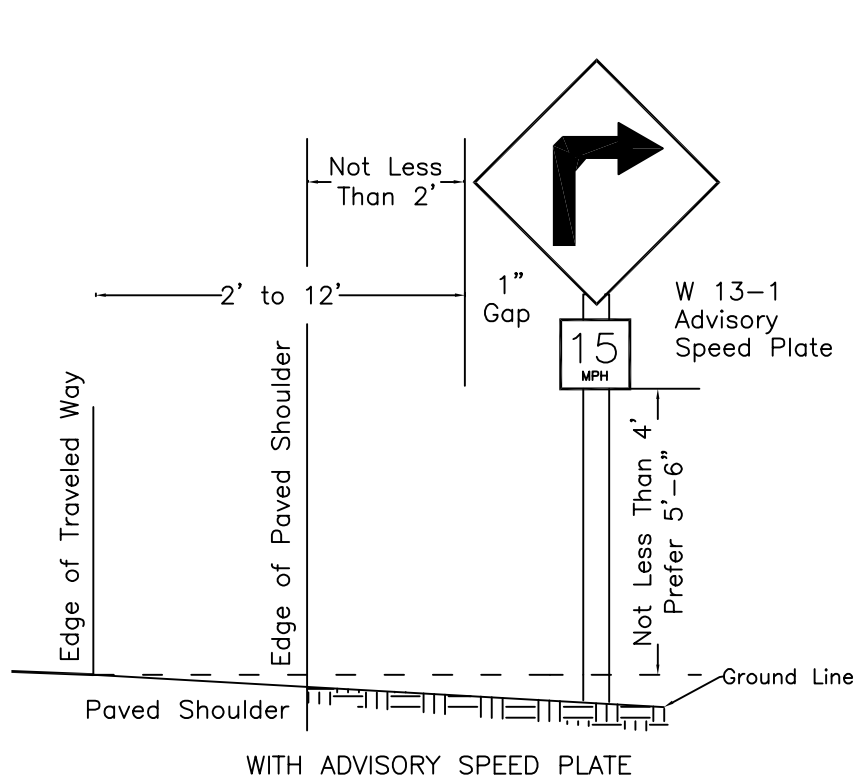

REFLECTIVE SIGN POSITIONING METHOD

To obtain maximum reflection from traffic signs, yet eliminate specular glare, signs shall be correctly aligned. Specular glare is mirror-type reflection that is characteristic of any glossy surface. Specular glare can make sign legend unreadable.

Position sign such that the vertical axis is plumb and the horizontal axis is at an angle of 93° with the traffic lane that the sign serves.

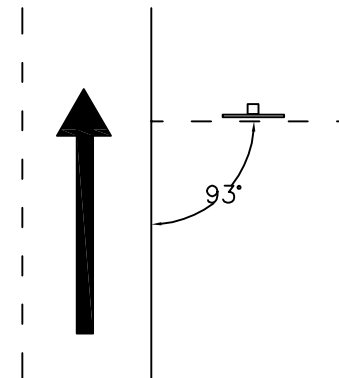

PUBLIC WORKS
DEPARTMENT

SIGN POSITIONING DETAIL

DWG.
NO. 3-52