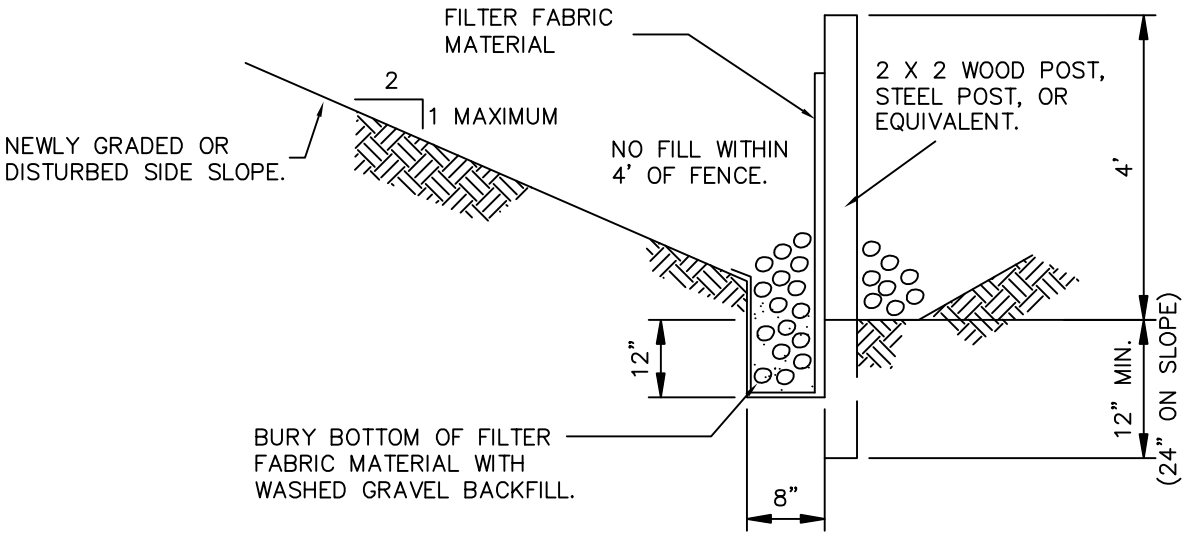

TYPICAL CROSS SECTION

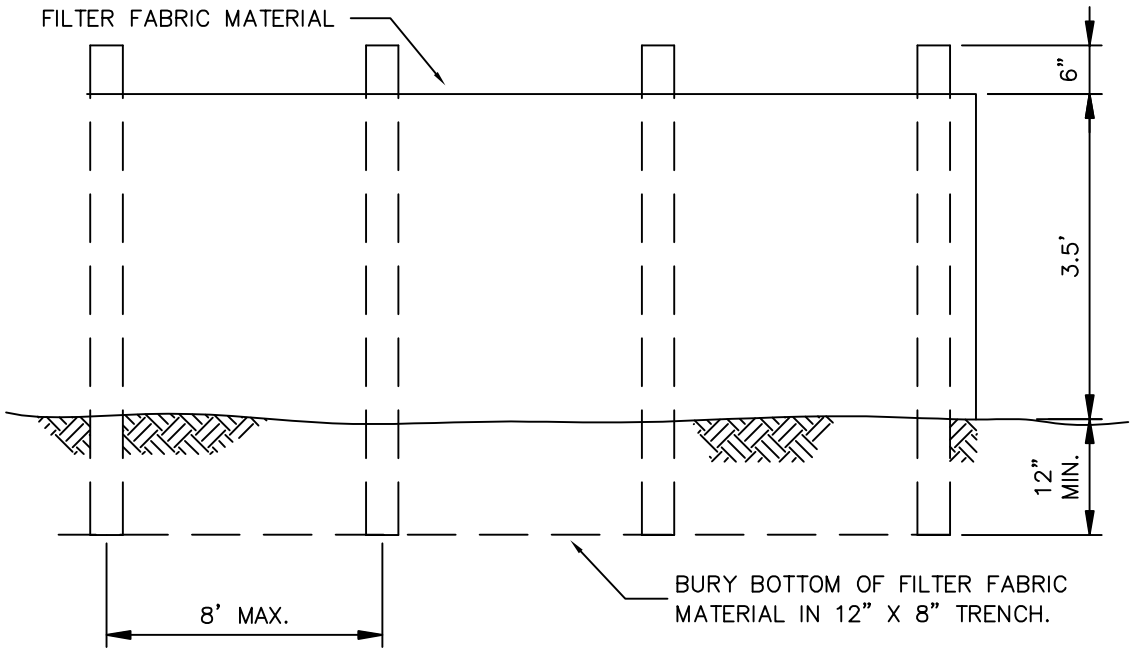

ELEVATION

NOTES:

1. PREFAB FENCE ALLOWED IF REINFORCED AND APPROVED BY THE CITY CLEARING AND GRADING INSPECTOR.
2. FENCE SHALL NOT BE INSTALLED ON SLOPES STEEPER THAN 2:1.
3. JOINTS IN FILTER FABRIC SHALL BE OVERLAPPED 6 INCHES AT POST.
4. USE STAPLES, WIRE RINGS, OR EQUIVALENT TO ATTACH FABRIC TO FENCE.
5. REMOVE SEDIMENT WHEN IT REACHES 1/3 FENCE HEIGHT.

CITY OF SEDRO-WOOLLEY "GATEWAY TO THE NORTH CASCADES" PUBLIC WORKS DEPARTMENT	SILT FENCE	DWG. NO. 4-21