



GRAVEL BERM CROSS SECTION

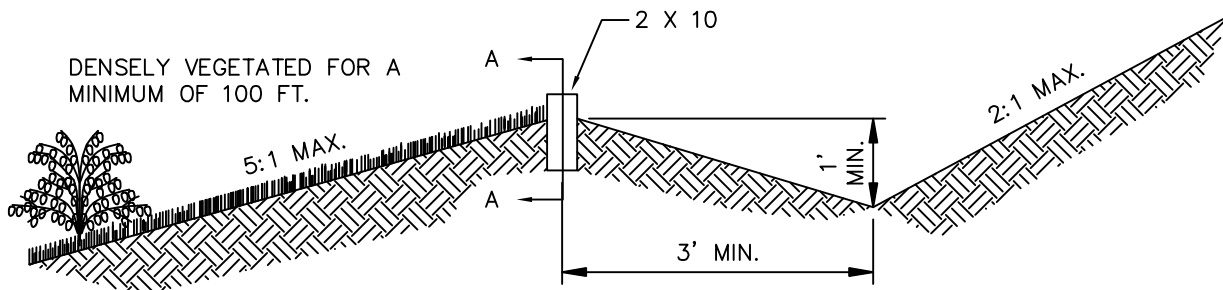

CROSS SECTION

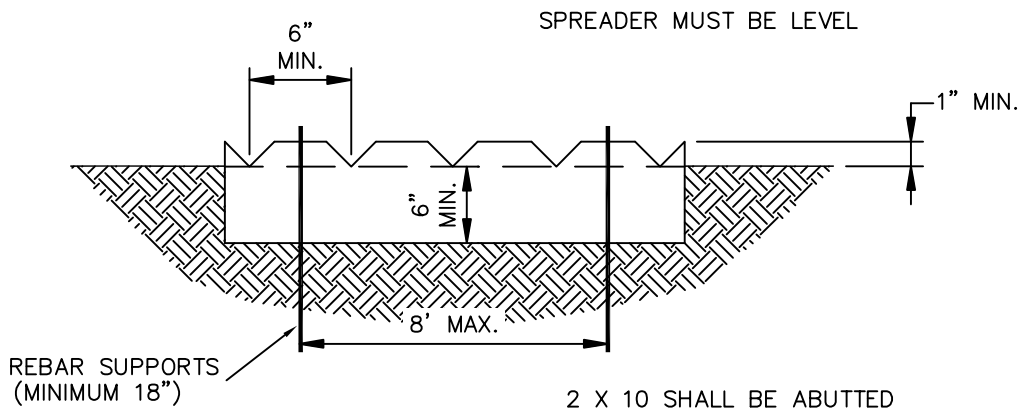

SPREADER MUST BE LEVEL

2 X 10 SHALL BE ABUTTED
END TO END FOR MAXIMUM
SPREADER LENGTH OF 50'

SECTION A

NOTES:

1. ANY DAMAGE TO THE SPREADER SHALL BE IMMEDIATELY REPAIRED.
2. THE DOWNSLOPE AREA SHALL BE CHECKED FOR SIGNS OF EROSION AND TO VERIFY THAT THE SPREADER IS NOT CREATING A POINT DISCHARGE. ANY ERODED AREAS SHALL BE IMMEDIATELY STABILIZED.

